

# Datasheet F-112AC

## Mass Flow Meter for Gases

### > Introduction

High-Tech model F-112AC Mass Flow Meters (MFM) are suited for precise measurement of virtually all conventional process gases. The MFM consists of a thermal mass flow sensor and a microprocessor based pc-board with signal and fieldbus conversion and a PID controller for optional mass flow control by means of a separately mounted control valve. The mass flow, expressed in normal millilitres per minute or per hour, is provided as analog signal or digitally via RS232 or fieldbus. The flow range and wetted materials are determined depending of the type of gas and the process conditions of the application.

Although all specifications in this datasheet are believed to be accurate, the right is reserved to make changes without notice or obligation.

### > Technical specifications

#### EL-FLOW Mass Flow Meter model F-112AC

#### Measurement / control system

|                                                             |                                                                                                                  |
|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Accuracy (incl. linearity)<br>(Based on actual calibration) | : $\pm 0,5\%$ Rd plus $\pm 0,1\%$ FS                                                                             |
| Turndown                                                    | : 1 : 50 (in digital mode up to 1:187,5)                                                                         |
| Multiple fluid capability                                   | : • storage of max. 8 calibration curves<br>• optional Multi Gas / Multi Range<br>functionality up to 10 bar abs |
| Repeatability                                               | : $\pm 0,2\%$ Rd                                                                                                 |
| Response time ( $t_{63\%}$ )                                | : 2...4 sec                                                                                                      |
| Temperature range                                           | : -10...+70°C                                                                                                    |
| Temperature sensitivity<br>(nominal range)                  | : zero: $\pm 0,05\%$ FS/°C;<br>span: $\pm 0,05\%$ Rd/°C                                                          |
| Leak integrity (outboard)                                   | : $< 2 \times 10^{-9}$ mbar l/s He                                                                               |
| Attitude sensitivity                                        | : max. error at 90° off horizontal 0,2% FS<br>at 1 bar, typical N <sub>2</sub>                                   |
| Warm-up time                                                | : 30 min. for optimum accuracy<br>2 min. for accuracy $\pm 2\%$ FS                                               |

#### Mechanical parts

|                                     |                                                         |
|-------------------------------------|---------------------------------------------------------|
| Material (wetted parts)             | : stainless steel 316L or<br>comparable Pressure rating |
| Process connections                 | : compression type or face seal male                    |
| Seals                               | : standard : Viton; options: EPDM,                      |
| Kalrez Ingress protection (housing) | : IP40                                                  |

#### Electrical properties

|                                              |                                                                                                                             |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Power supply                                 | : +15...24 Vdc $\pm 10\%$                                                                                                   |
| Power consumption                            | : max. 320 mA;<br>add 50 mA for Profibus, if applicable                                                                     |
| Analog output                                | : 0...5 (10) Vdc, min. load impedance $> 2\text{ k}\Omega$<br>0 (4)...20 mA (sourcing), max. load impedance $< 375\ \Omega$ |
| Analog setpoint<br>(for MFM + control valve) | : 0...5 (10) Vdc, min. load impedance $> 100\text{ k}\Omega$ ;<br>0 (4)...20 mA, load impedance $\sim 250\ \Omega$          |
| Digital communication                        | : standard RS232 ; options: Profibus-DP®, DeviceNet™,<br>EtherCAT®, Modbus-RTU/ASCII, FLOW-BUS                              |

### > Ranges (based on Air)

| Model       | minimum                      | nominal                       | maximum                       |
|-------------|------------------------------|-------------------------------|-------------------------------|
| F-112AC-M10 | 0,8...40 l <sub>n</sub> /min | 0,8...100 l <sub>n</sub> /min | 0,8...150 l <sub>n</sub> /min |
| F-112AC-M20 | 1,4...70 l <sub>n</sub> /min | 1,4...200 l <sub>n</sub> /min | 1,4...250 l <sub>n</sub> /min |


Intermediate ranges are available

Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395) 279-98-46  
Киргизия (996)312-96-26-47  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Таджикистан (992)427-82-92-69


Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

## > Model number identification

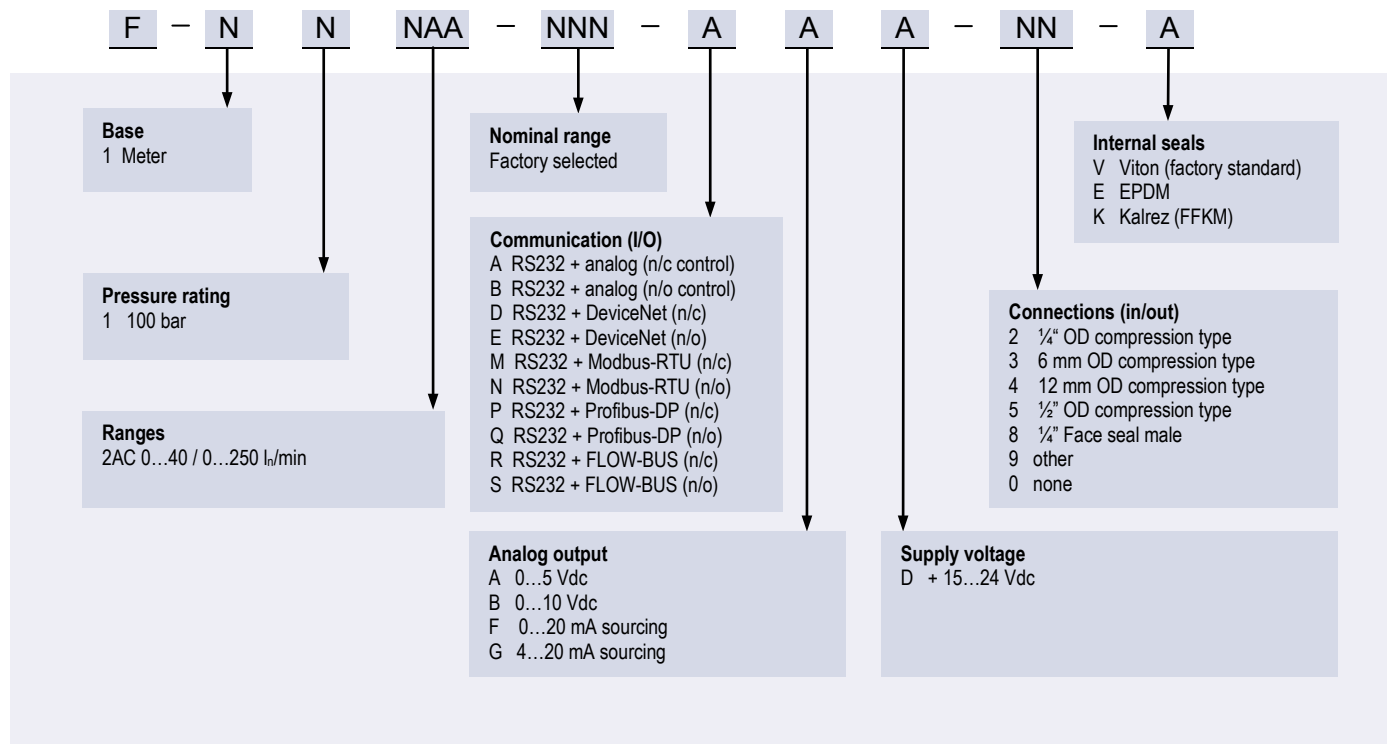

## > Thermal mass flow measuring principle


The heart of the thermal mass flow meter/controller is the sensor, that consists of a stainless steel capillary tube with resistance thermometer elements. A part of the gas flows through this bypass sensor, and is warmed up heating elements. Consequently the measured temperatures  $T_1$  and  $T_2$  drift apart. The temperature difference is directly proportional to mass flow through the sensor. In the main channel High-Tech applies a patented laminar flow element consisting of a stack of stainless steel discs with precision-etched flow channels. Thanks to the perfect flow-split the sensor output is proportional to the total mass flow rate.

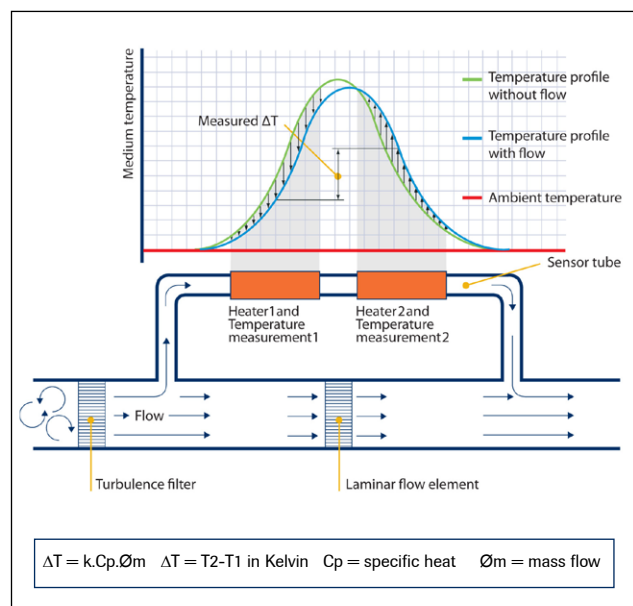

Functional scheme of the thermal mass flow sensor


## > State of the art digital design

Today's EL-FLOW<sup>®</sup> series are equipped with a digital pc-board, offering high accuracy, excellent temperature stability and fast response. The basic digital pc-board contains all of the general functions needed for measurement and control. In addition to the standard RS232 output the instruments also offer analog I/O. Furthermore, an integrated interface board provides DeviceNet<sup>™</sup>, Profibus-DP<sup>®</sup>, Modbus-RTU or FLOW-BUS protocols.

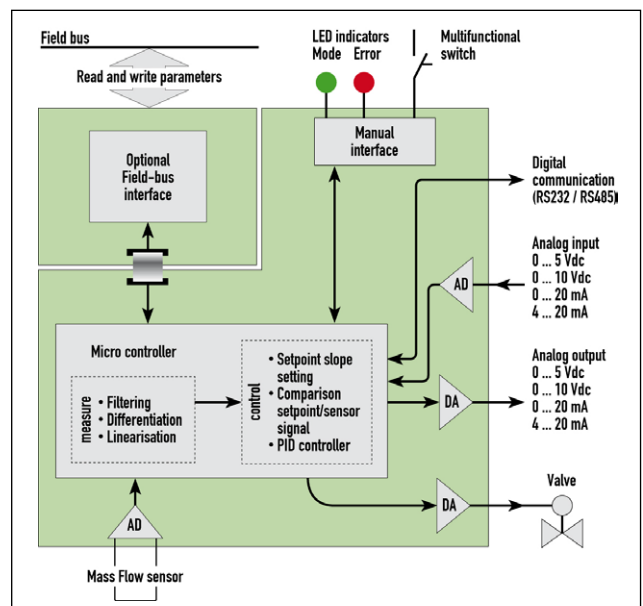


Functional scheme of the digital PC-board


### > Hook-up diagram for analog or RS232 communication

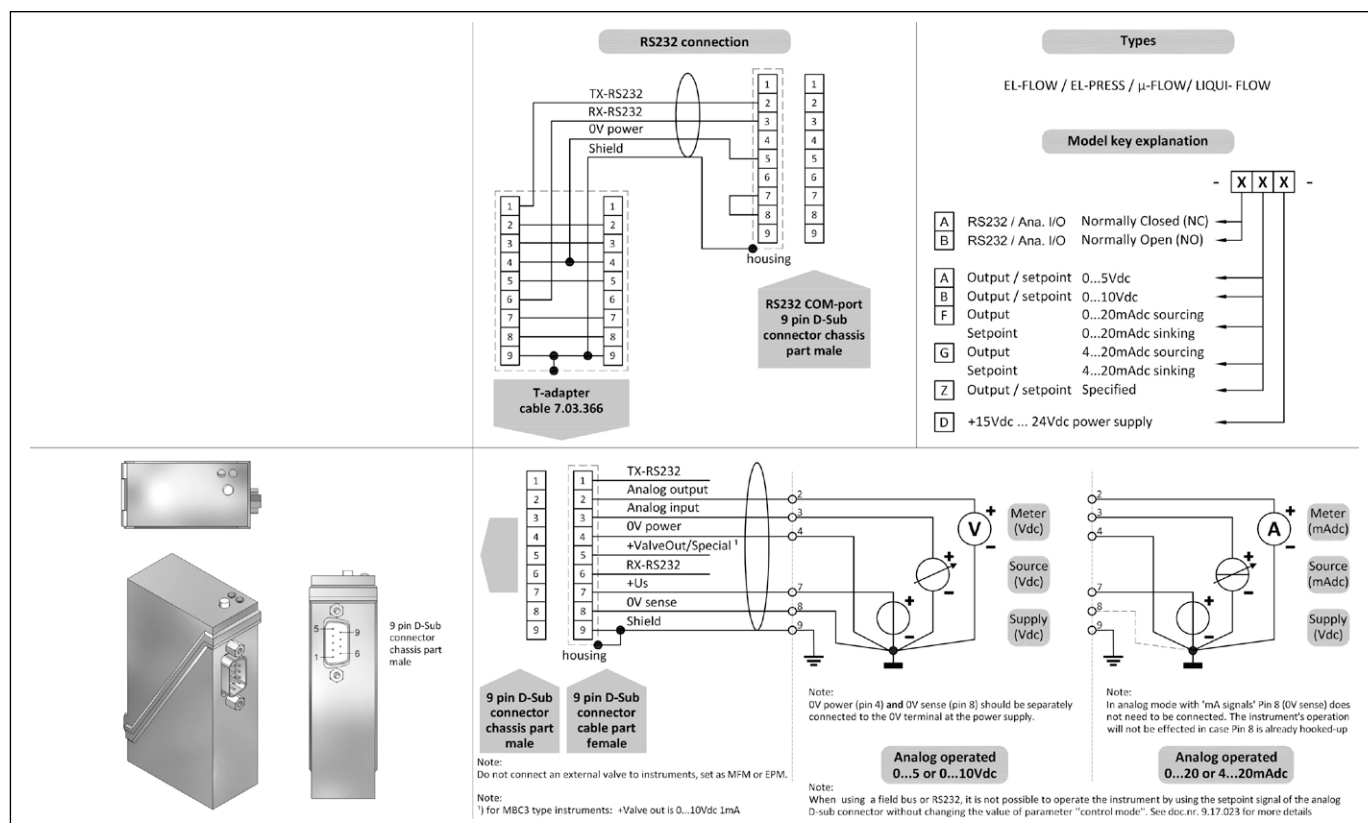

## > Hook-up diagrams for fieldbus communication

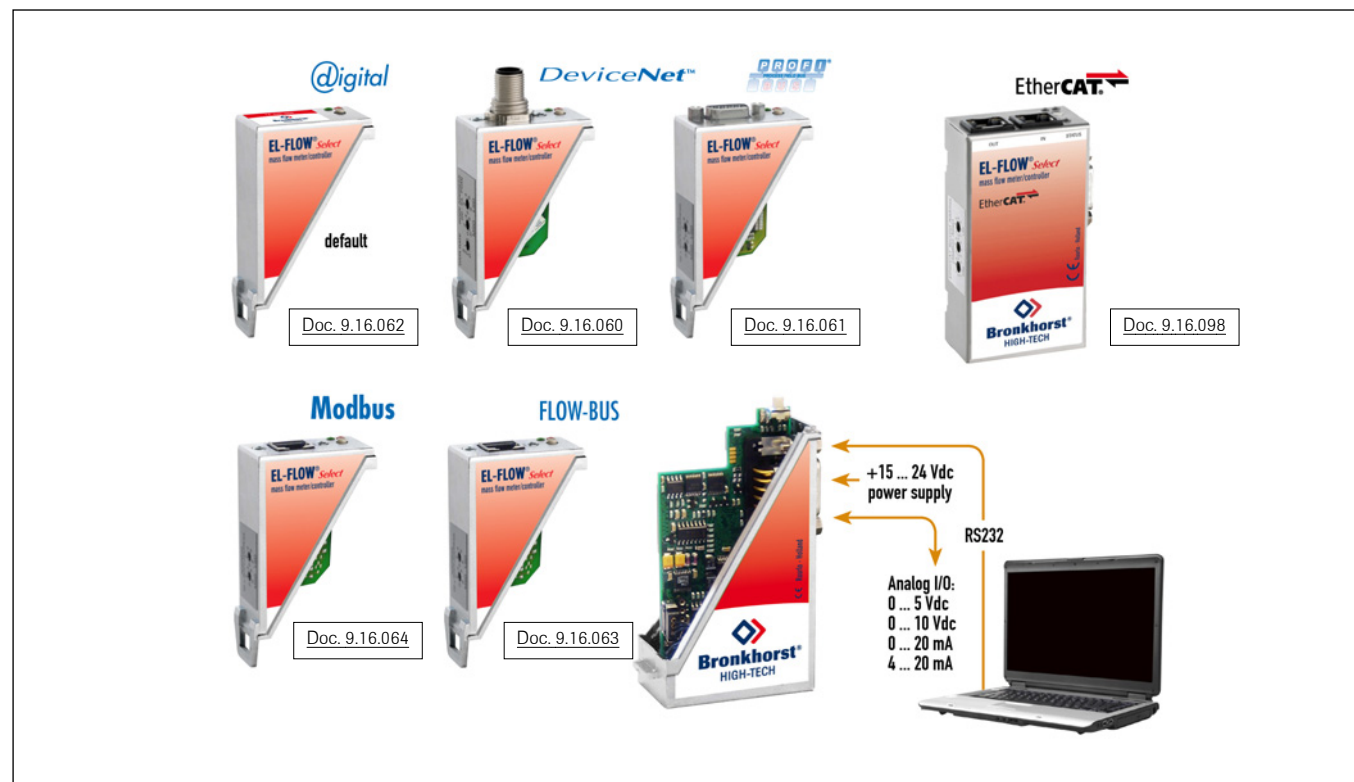


## > Dimensions (mm) and weight (kg)

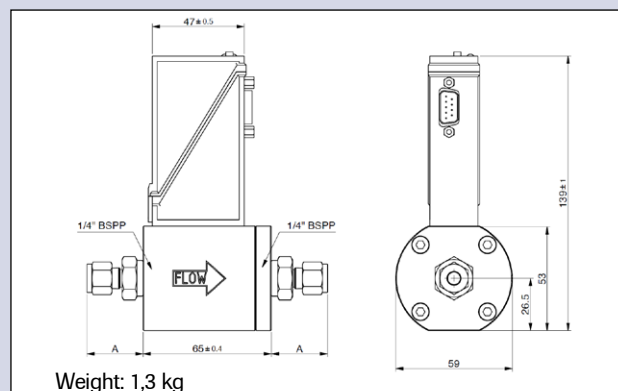

Dimension table adapters (RS-type)

| Compression type |       | 1/4"BSPP |
|------------------|-------|----------|
|                  |       | Size A   |
| adapter 6 mm     | OD    | 28.4     |
| adapter 8 mm     | OD    | 29.4     |
| adapter 10 mm    | OD    | 30.2     |
| adapter 12 mm    | OD    | 32.5     |
| adapter 1/4"     | OD    | 28.4     |
| adapter 3/8"     | OD    | 29.9     |
| adapter 1/2"     | OD    | 32.7     |
| Face-seal male   |       | Size A   |
| adapter 1/4"     | inlet | 23.2     |

Compression type



\*) Dimension A is typical finger-tight.

## > Options and accessories

|                                                                                                                                                                                                                                                                |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ul style="list-style-type: none"> <li>- Multi-Gas / Multi-Range option, with free configuration software.</li> <li>- Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software.</li> </ul> |  |
| <ul style="list-style-type: none"> <li>- IN-LINE filters for protection against particulates</li> </ul>                                                                                                                                                        |  |
| <ul style="list-style-type: none"> <li>- BRIGHT compact local Readout/Control modules</li> <li>- E-5700 / E-7000 Power Supply</li> </ul>                                                                                                                       |  |
| <ul style="list-style-type: none"> <li>- Interconnecting cables for power and analog/digital communication</li> <li>- PiPS Plug-in Power Supply</li> </ul>                                                                                                     |  |

## > Alternatives

|                                                                                                                                        |  |
|----------------------------------------------------------------------------------------------------------------------------------------|--|
| <ul style="list-style-type: none"> <li>- LOW-ΔP-FLOW series MFM for low pressure drop applications or corrosive gas service</li> </ul> |  |
| <ul style="list-style-type: none"> <li>- IN-FLOW MFM with industrial (IP65) housing</li> </ul>                                         |  |
| <ul style="list-style-type: none"> <li>- IN-FLOW<sup>CTA</sup> direct (no by-pass), industrial (IP65) Mass Flow Meter</li> </ul>       |  |

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72  
Астана +7(7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395) 279-98-46  
Киргизия (996)312-96-26-47

Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижегород (831)429-08-12  
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93