

Datasheet F-23xMI

MFC for High-Pressure / High-ΔP Applications, Industrial Design

> Introduction

High-Tech model F-23xMI Mass Flow Controllers (MFCs) are designed for high (differential) pressure applications and suited for precise control of virtually all conventional process gases. The MFC consists of a thermal mass flow sensor, a unique, patented control valve and a microprocessor based PID controller with signal and fieldbus conversion. As a function of a setpoint value, the flow controller swiftly adjusts the desired flow rate. The IN-FLOW model is of rugged design (IP65) for use in industrial environments or even Zone 2 hazardous areas, with optional ATEX Cat. 3 approval. The mass flow, expressed in normal litres or millilitres per minute or per hour, is provided as analog signal or digitally via RS232 or fieldbus. The flow range, wetted materials and orifice size for the control valve are determined depending of the type of gas and the process conditions of the application.

> Technical specifications

Measurement / control system

Accuracy (incl. linearity) (Based on actual calibration)	: ± 0,5% Rd plus ± 0,1% FS
Turndown	: 1 : 50
Multiple fluid capability	: storage of max. 8 calibration
curves Repeatability	: < ± 0,2% Rd
Settling time (controller)	: 2...4
seconds	
Control stability	: ≤ ± 0,1% FS (typical for 1 l _n /min N ₂)
Temperature range	: -10...+70°C
Temperature sensitivity	: zero: < ± 0,05% FS/°C; span: < ± 0,05% Rd/°C
Leak integrity (outboard)	: < 2 x 10 ⁻⁹ mbar l/s He
Attitude sensitivity	: max. error at 90° off horizontal 0,2% FS at 1 bar, typical N ₂
Warm-up time	: 30 min. for optimum accuracy 2 min. for accuracy ± 2% FS

Mechanical parts

Material (wetted parts)	: stainless steel 316L or
comparable Pressure rating	: 400 bar abs
Process connections	: compression type or face seal male
Seals	: standard : Viton; options: EPDM,
Kalrez Ingress protection (housing)	: IP65

Although all specifications in this datasheet are believed to be accurate, the right is reserved to make changes without notice or obligation.

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Electrical properties

Power supply	: +15...24 Vdc ±10%
Power consumption	: max. 320 mA; add 50 mA for Profibus, if applicable
Analog output	: 0...5 (10) Vdc, min. load impedance > 2 k Ω; 0 (4)...20 mA (sourcing), max. load impedance < 375 Ω
Analog setpoint	: 0...5 (10) Vdc, min. load impedance > 100 k Ω; 0 (4)...20 mA, load impedance ~250 Ω
Digital communication	: standard RS232; options: Profibus-DP®, DeviceNet™, Modbus-RTU/ASCII, FLOW-BUS

> Ranges (based on Air)

Model	minimum	maximum
F-230MI	0,2...10 ml _n /min	10...500 ml _n /min
F-231MI	10...500 ml _n /min	0,2...10 l _n /min
F-232MI	0,2...10 l _n /min	2...100 l _n /min


Intermediate ranges are available

По вопросам продаж и поддержки обращайтесь:

Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	


Эл. почта brk@nt-rt.ru || Сайт: <http://steamflow.nt-rt.ru>

> Model number identification

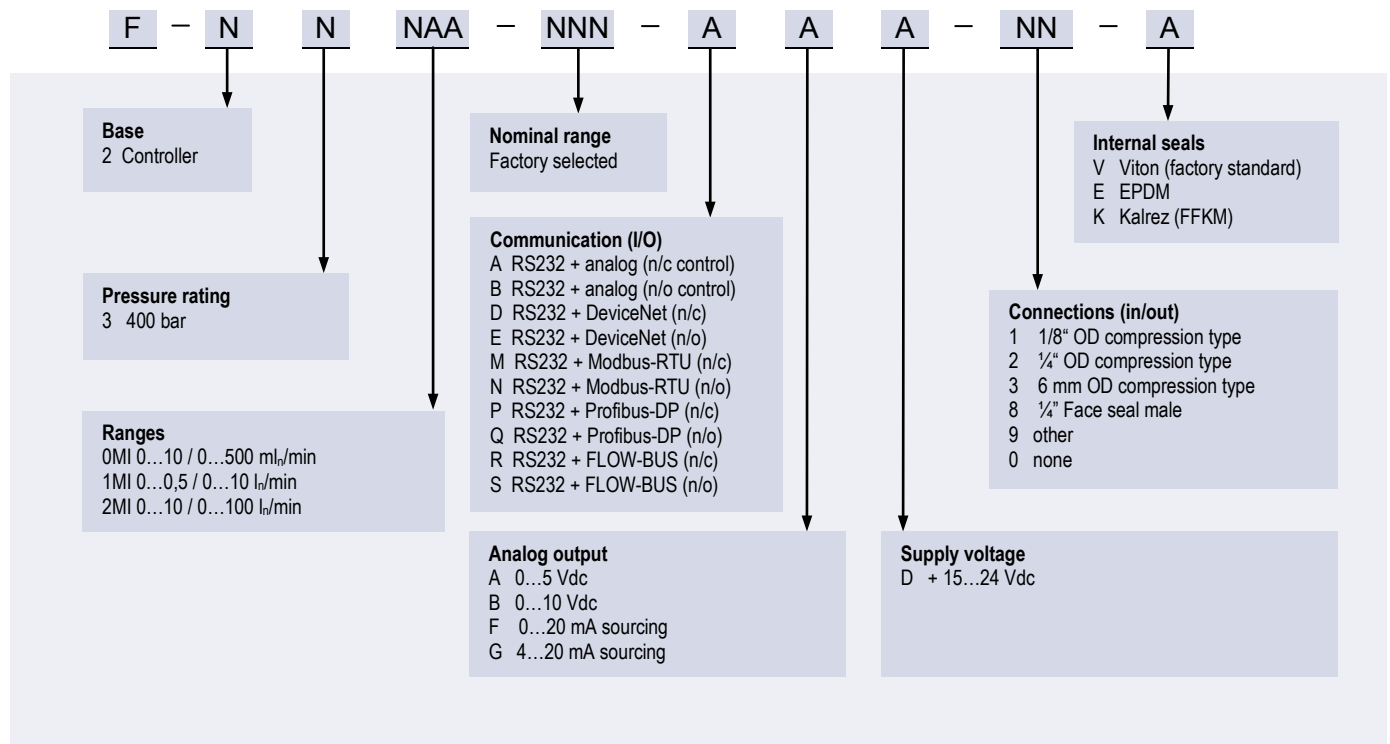

> Thermal mass flow measuring principle


The heart of the thermal mass flow meter/controller is the sensor, which consists of a stainless steel capillary tube with resistance thermometer elements. A part of the gas flows through this bypass sensor, and is warmed up heating elements. Consequently the measured temperatures T_1 and T_2 drift apart. The temperature difference is directly proportional to mass flow through the sensor. In the main channel High-Tech applies a patented laminar flow element consisting of a stack of stainless steel discs with precision-etched flow channels. Thanks to the perfect flow-split the sensor output is proportional to the total mass flow rate.

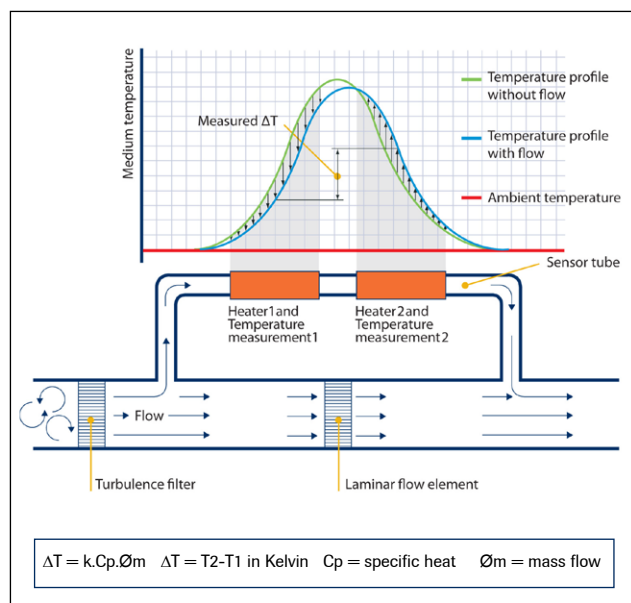

Functional scheme of the thermal mass flow sensor


> State of the art digital design

Today's IN-FLOW series are equipped with a digital pc-board, offering high accuracy, excellent temperature stability and fast response (settling times t_{98} down to 500 msec). The basic digital pc-board contains all of the general functions needed for measurement and control. In addition to the standard RS232 output the instruments also offer analog I/O. Furthermore, an integrated interface board provides DeviceNet™, Profibus-DP®, Modbus-RTU/ASCII or FLOW-BUS protocols.

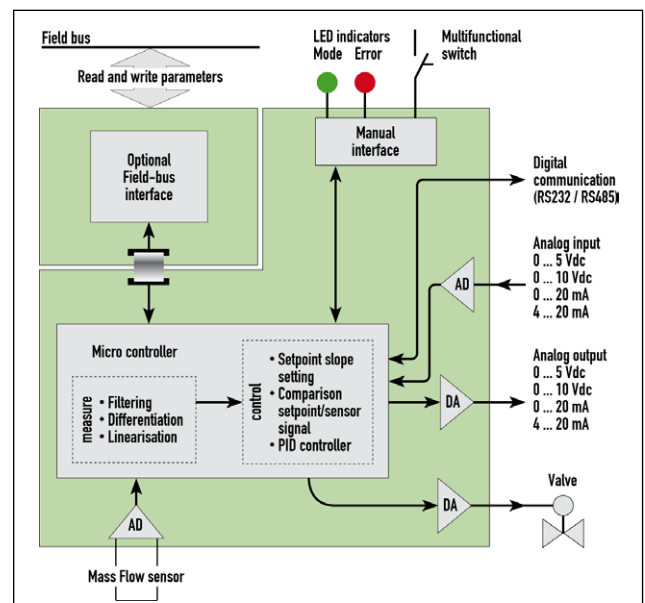


Functional scheme of the digital PC-board

> Hook-up diagram for analog or RS232 communication

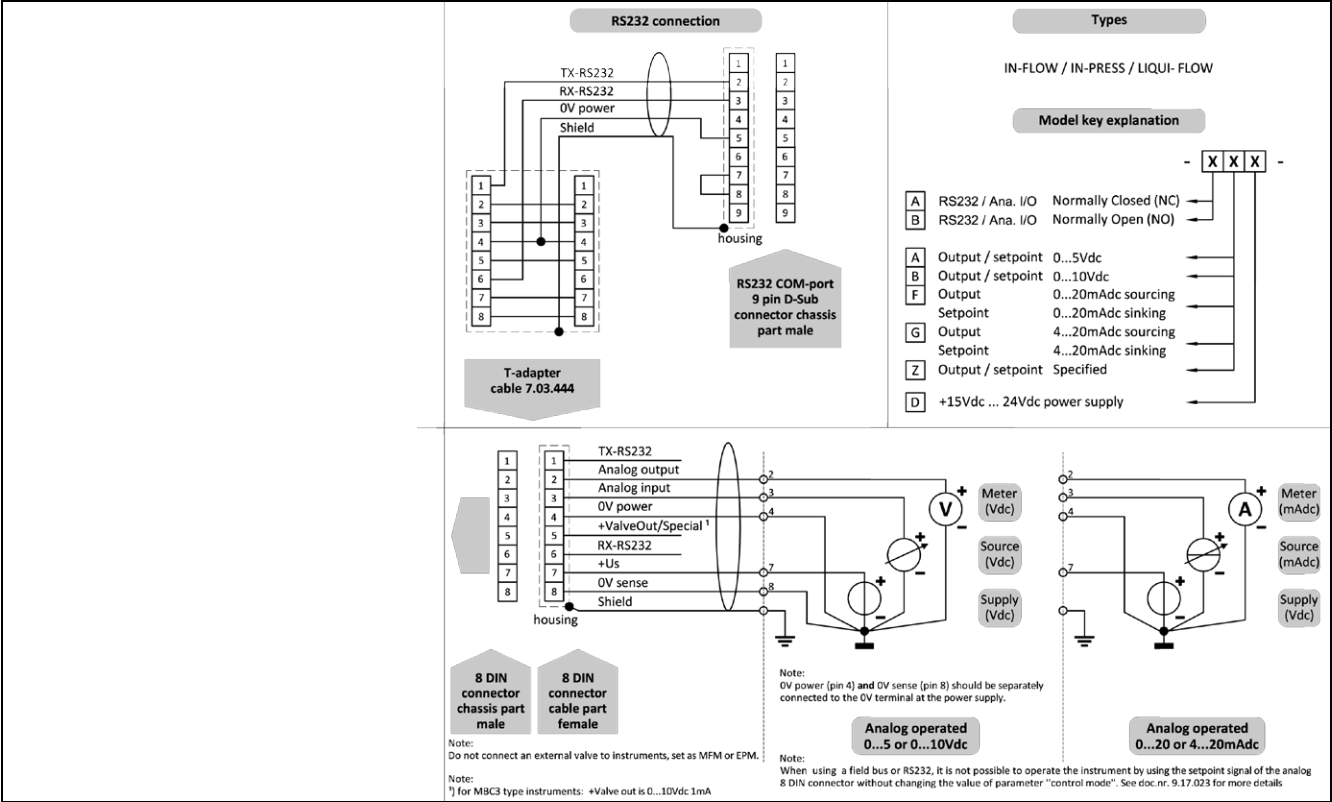


> Dimensions (mm) and weight (kg)

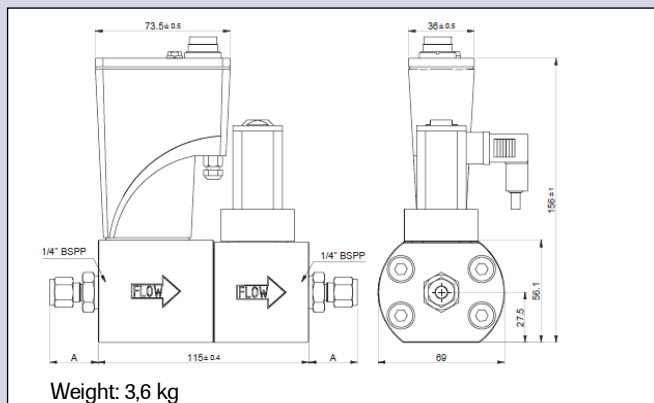

Dimension table adapters (RS-type)

Compression type		1/4" BSPP
		Size A
adapter 3 mm	OD	26.1
adapter 6 mm	OD	28.4
adapter 8 mm	OD	29.4
adapter 10 mm	OD	30.2
adapter 12 mm	OD	32.5
adapter 1/8"	OD	26.1
adapter 1/4"	OD	28.4
adapter 3/8"	OD	29.9
adapter 1/2"	OD	32.7
Face-seal male		Size A
adapter 1/4" inlet		23.2

Compression type



*) Dimension A is typical finger-tight.

> Options and accessories

- Multi-Gas / Multi-Range option, with free configuration software - Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software	
- IN-LINE filters for protection against particulates	
- BRIGHT compact local Readout/Control modules - E-5700 / E-7000 Power Supply	
- Interconnecting cables for power and analog/digital communication - PiPS Plug-in Power Supply	

> Alternatives

- EL-FLOW MFC with housing for non-industrial environment	
---	--

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана +7(7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395) 279-98-46
Киргизия (996)312-96-26-47

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93