

MAG VIEW

The high quality, economic and solid state magnetic inductive flow sensor for measuring water and aqueous solutions




> Description

The new MAG-VIEW™ series flow meters offer a high quality, economic and solid state solution for measuring flow in areas where flow sensors with moving parts cannot be applied. Its interference free operation, combined with a long-life cycle and the wide independence to the inlet and outlet pipes makes MAG-VIEW™ the perfect solution even in compact machines with cramped confines. The meter is intended for continuously measuring of flow rates or for dosing / batching of electrically conductive liquids with a minimum conductivity of 20 $\mu\text{S}/\text{cm}$.

> MAG-VIEW™ series

The MAG-VIEW™ series operate on magnetic inductive principle. The measuring pipe is in a magnetic field (B). If an electrically conductive medium (Q) passes through the measuring pipe and thus right-angled to the magnetic field, a voltage (U) will be induced into the medium which is proportional to the average flow velocity and picked up by the two electrodes.

MAG-VIEW™ flow meters can be supplied in three metal models 1 .. 20 l/min, 2 .. 40 l/min and 10 .. 200 l/min and 4 cost-optimized plastic models 0,25 .. 5 l/min, 2,5 .. 50 l/min, 5 .. 100 l/min and 12,5 .. 250 l/min. The frequency of the pulse signal and the optional analog output are proportional to the flow.

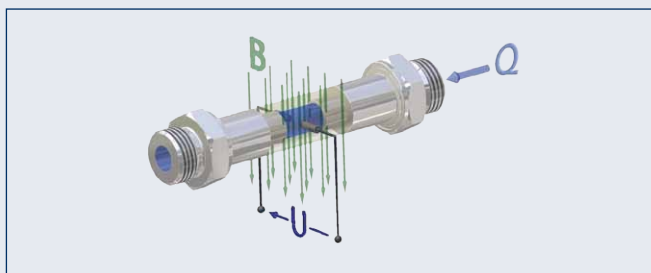

> MAG-VIEW™ features

- ◆ Make liquid flows visible by:
 - Pulse output
 - Analog output (4 .. 20 mA, option on metal models only)
 - Blinking LED (red/green)
- ◆ No mechanical wear
- ◆ No moving parts
- ◆ Ease of mounting and operation
- ◆ Free pipe cross section
- ◆ No additional pressure drop
- ◆ Fast response (< 100 ms)
- ◆ Insensitive with contaminated liquids
- ◆ Ideal solution for interference free operation combined with a long-life cycle
- ◆ Can be used in areas where flow sensors with moving parts cannot be applied
- ◆ Wide independence to the inlet and outlet pipes create the advantage to be able to install in compact machines with cramped confines.
- ◆ Lightweight and compact design
- ◆ Suitable for mobile applications
- ◆ Sustainable product design:
 - Maintenance free
 - Low power consumption

По вопросам продаж и поддержки обращайтесь:

Волгоград (844)278-03-48, Воронеж (473)204-51-73, Екатеринбург (343)384-55-89, Казань (843)206-01-48,
Краснодар (861)203-40-90, Красноярск (391)204-63-61, Москва (495)268-04-70, Нижний Новгород (831)429-08-12,
Новосибирск (383)227-86-73, Ростов-на-Дону (863)308-18-15, Самара (846)206-03-16, Санкт-Петербург (812)309-46-40,
Саратов (845)249-38-78, Уфа (347)229-48-12

Единый адрес: brk@nt-rt.ru

Веб-сайт: steamflow.nt-rt.ru

> Technical specifications MVM-Q Series

Performance	MVM-005-Q	MVM-050-Q	MVM-100-Q	MVM-250-Q
Flow range	0,25...5 l/min	2,5...50 l/min	5...100 l/min	12,5...250 l/min
Max. flow rate	6 l/min	60 l/min	120 l/min	300 l/min
Accuracy*	±1 %RD			
Repeatability	1 %			
Rangeability	1:20			
Signal output starting from	~ 0,1 l/min	~ 1 l/min	~ 2 l/min	~ 5 l/min
Medium	Water and other conductive liquids			
min. conductivity of the medium	20 µS/cm (lower conductivity affects the accuracy)			
Operating temperature	Medium -10...60°C, Ambient 5...60 °C, not freezing			
Nominal pressure	max. 10 bar at 20 °C, 8 bar at 40 °C, 6 bar at 60 °C			
Nominal diameter	DN 8	DN 15	DN 20	DN 25
Process connection	½" BSP male thread	¾" BSP male thread	1" BSP male thread	1¼" BSP male thread
Flow indication	red led is power, green led pulsing is flow			
Response time	< 100 ms			


Mechanical specifications

Ingress protection	IP 65		
Materials	ABS		
Housing	ABS		
Wetted parts	Electrodes and grounding rings	: Stainless Steel 316L	
	Measuring pipe	: PVDF	
	Process connections	: PVDF	

Electrical specifications

Frequency output				
Pulse rate / K-factor	4000 pulses/l	400 pulses/l	200 pulses/l	80 pulses/l
Resolution	0,25 ml/pulse	2,5 ml/pulse	5 ml/pulse	12,5 ml/pulse
Signal shape	PNP or NPN open collector			
Signal current	max. 25 mA			
Electrical connection	4-pin-plug M12x1			
Power supply	24 VDC ±10 %			
Power consumption	max. 80 mA, 0,6 W			
Electrical protection measures	short-circuit proof, protected against polarity reversal			

Pin assignment




PIN 1: +U
PIN 3: GND
PIN 2/4: frequency output NPN/PNP

All information is subject to change without notice.

* Test conditions: Water 23 °C.


> Electrical connection NPN or PNP

The MAG-VIEW™ has an NPN or PNP frequency signal depending on the configuration outlined below.

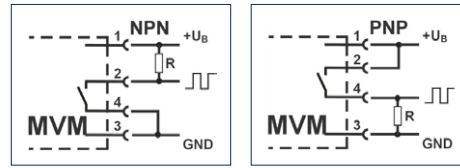


> Dimensional drawing (mm)

MVM - 005 / 050 / 100 - Q

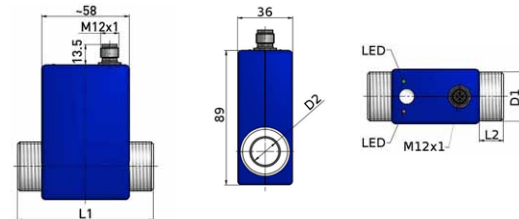


MVM-250-Q

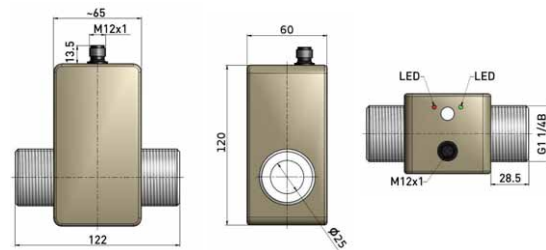

Type	L1	L2	D1	D2
MVM-005-Q	85	13	G½ B	ø 8
MVM-050-Q	90	15,5	G¾ B	ø 14
MVM-100-Q	90	15,5	G1 B	ø 18

> Pressure drop

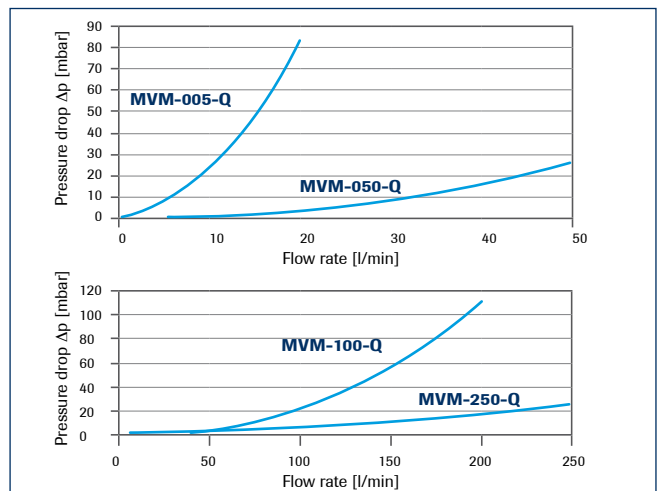

> Model number identification

MVM - N N N - A

Max flow

005	5 l/min	100	100 l/min
020	20 l/min	200	200 l/min
040	40 l/min	250	250 l/min
050	50 l/min		

Output

PN	output pulse, no analog
PA	output pulse + 4...20 mA
Q	output pulse, no analog

> Technical specifications

Performance	MVM-020	MVM-040	MVM-200
Flow range	1...20 l/min	2...40 l/min	10...200 l/min
Accuracy	±2 %RD		
Reproducibility	1 %		
Rangeability	1:20		
Signal output starting from	~ 0,5 l/min	~ 1 l/min	~ 5 l/min
Medium	Water and other conductive liquids		
min. conductivity of the medium	50 µS/cm (lower conductivity affects the accuracy)		
Operating temperature	0...90 °C (not freezing)		
Nominal pressure	PN 16		
Nominal diameter	DN 7	DN 10	DN 20
Process connection	½" BSP male thread		1" BSP male thread
Flow indication	LED green, flow proportional flashing		
Response time	< 500 ms		


Mechanical specifications

Ingress protection	IP 65		
Materials			
Housing	Aluminium pressure diecasted		
Wetted parts	Electrodes:	Stainless Steel 1.4571	
	Process connections:	Stainless Steel 1.4571	
	Measuring pipe:	PEEK Victrex 450GL30	
	Gasket:	EPDM	

Electrical specifications

Frequency output			
Pulse rate / K-factor	855 pulses/l	855 pulses/l	200 pulses/l
Resolution	1,2 ml/pulse	1,2 ml/pulse	5 ml/pulse
Signal shape	Square wave signal • duty cycle 50:50		
Signal current	max. 20 mA, current limited		
Analog output (optional)			
Signal current	4...20 mA		
max. signal current	~ 26 mA		
max. load	250 Ω to GND		
Electrical connection	4-pin-plug M12x1		
Power supply	24 VDC ±10 %		
Power consumption	max. 80 mA		
Electrical protection	short-circuit proof (up to 30 V)		
measures	polarity protection (up to -30 V)		

Pin assignment



PIN 1: +U
 PIN 2: analog output 4...20 mA (optional)
 PIN 3: GND
 PIN 4: frequency output ЛГ
 PIN 5: do not connect


All information is subject to change without notice.

> Connection to a Programmable Logic Controller (PLC)

Most digital PLC inputs are designed for connection to PNP signals. The MVM has an NPN frequency signal with an integrated 2kΩ pull-up resistor. Its signal current of ~12 mA is recognised as a signal by the current PLC.


Thus, operating a MVM with a PLC should not present any problems. The frequency output of the MVM should be attached to a digital input of the PLC.

Important! Please ensure that your PLC is able to process the high frequencies of the MVM output signal.




> Dimensional drawing (mm)


MVM-020 and MVM-040

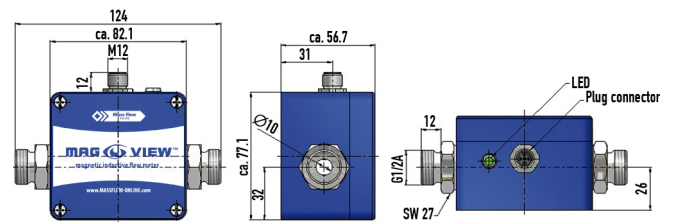

MVM-200

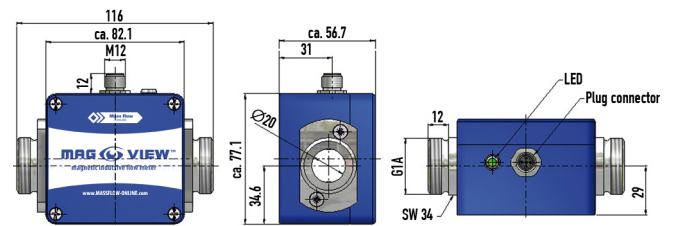

> Pressure drop

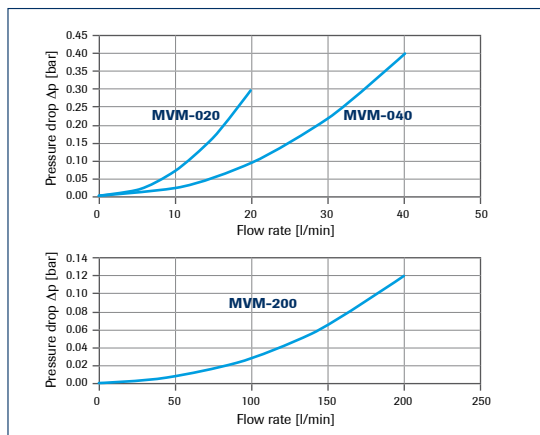

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395) 279-98-46
 Киргизия (996)312-96-26-47

Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Казахстан (772)734-952-31

Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Таджикистан (992)427-82-92-69

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93